Keyed Pocket Door Lock Installation Instructions


First, determine the handing of your door.

The door's location relative to the pocket determines the handing on a sliding pocket door. If the pocket for the door is on the left when viewed from the exterior side of the opening, the door is left-handed. If the pocket is to the right of the door when viewed from the exterior side, it is right-handed.



For installation on right-hand doors.

1. Install the latch in the door. (The edge of the latch should face to the right.)
2. Insert the exterior (keyed) cup pull in the prepared hole, making sure the tailpiece is in a horizontal orientation.
3. Place the interior (thumb turn) cup pull in the prepared hole, inserting the tailpiece into the receiver.
4. Use the connecting screws to attach the two cups.
5. Install the dust box and strike in the door jamb.

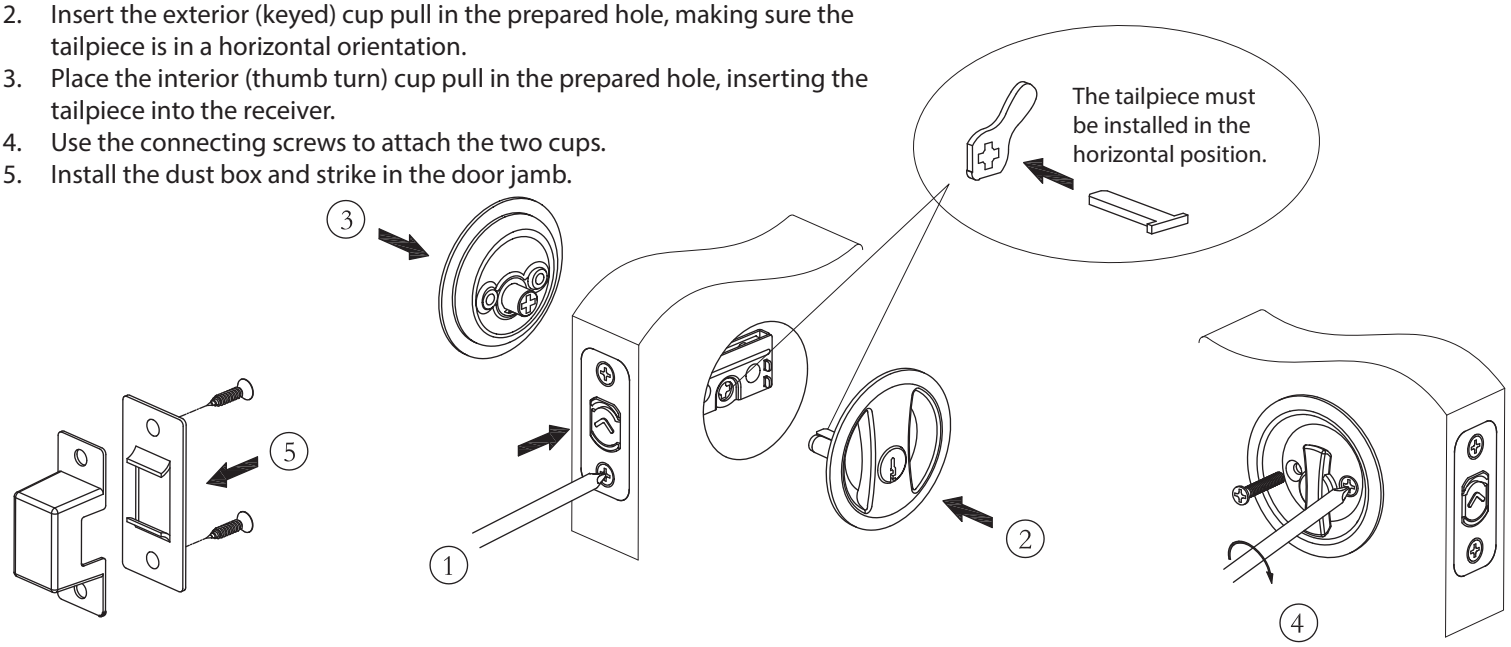

For installation on left-hand doors.

1. Install the latch in the door. (The edge of the latch should face to the left.)
2. Insert the exterior (keyed) cup pull in the prepared hole, making sure the tailpiece is in a vertical orientation.
3. Place the interior (thumb turn) cup pull in the prepared hole, inserting the tailpiece into the receiver.
4. Use the connecting screws to attach the two cups.
5. Install the dust box and strike in the door jamb.

